

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
WO 02/25501 A2

- (51) International Patent Classification<sup>7</sup>: G06F 17/30 (74) Agent: PYSHER, Paul, A.; Fish & Richardson, P.C., 225 Franklin Street, Boston, MA 02110 (US).
- (21) International Application Number: PCT/US01/29787
- (22) International Filing Date:  
24 September 2001 (24.09.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
09/667,737 22 September 2000 (22.09.2000) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US 09/667,737 (CON)  
Filed on 22 September 2000 (22.09.2000)
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): EMATION, INC. [US/US]; Cabot Business Park, 89 Forbes Boulevard, Mansfield, MA 02048 (US).
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): HANSEN, James, R. [US/US]; 66 Stoneridge Road, Franklin, MA 02038 (US).
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

WO 02/25501 A2

(54) Title: RETRIEVING DATA FROM A SERVER

(57) Abstract: A system includes a server and a controller embedded in a device. Both the server and the embedded controller are capable of communicating over a computer network. The embedded controller sends a command to the server over the computer network that identifies an instance of the device. In response, the server identifies the instance of the device based on the command, retrieves data that is specific to the instance of the device, and sends the data to the embedded controller over the computer network.

RETRIEVING DATA FROM A SERVER

5

Background

This invention relates to a controller embedded in a device (an "embedded controller") that retrieves data from a remote server for a specific instance of the device.

A device may contain an embedded controller, such as a  
10 microprocessor, to monitor and control its operation. Any type of device may have an embedded controller, including, but not limited to, home appliances, such as washing machines, dishwashers, and televisions, and manufacturing equipment, such as robotics, conveyors and motors.

15 Embedded controllers, also referred to as "embedded devices", are often connected to an internal network, such as a local area network (LAN), with an interface to the Internet. Other devices on the internal network may communicate with the embedded controllers over the internal network. However,  
20 the embedded controllers are not generally addressable from the Internet.

Summary

In general, in one aspect, the invention is directed to a controller embedded in a device for retrieving data from a  
5 server. The controller sends a command to the server that identifies an instance of the device and receives, from the server and in response to command, data that is specific to the instance of the device.

This aspect of the invention may include one or more of  
10 the following. The command may include an operational parameter for the device and the data may include an updated value for the operational parameter. The command may include plural operational parameters for the device and the data may include updated values that differ from current values of the  
15 operational parameters.

The data may include a list of operational parameters. In this case, the embedded controller sends a second command to the server, which includes operational parameters from the list, and receives, from the server and in response to second  
20 command, updated values of one or more of the operational parameters included in the second command. The data may include a list of operations to be performed by the

controller. In this case, the embedded controller parses the operations from the list and performs the operations from the list.

The data may include a configuration file for the device.

- 5 The command may identify the instance of the device by a device type and/or one or more of a serial number and a universal unique identifier. The embedded controller may send the command to the server periodically. The server may run the Hypertext Transfer Protocol and the command may contain
- 10 Extensible Markup Language code.

In general, in another aspect, the invention is directed to a server for sending data over a network to a controller embedded in a device. The server receives a command from the embedded controller, identifies an instance of the device from

15 information in the command, retrieves data that is specific to the instance of the device, and sends the data to the embedded controller.

This aspect of the invention may include one or more of the following features. The command may include a device type

20 and/or one or more of a serial number and a universal unique identifier. The instance of the device may be identified based on the device type and/or one or more of the serial

number and the universal unique identifier. The server may parse the device type and one or more of the serial number and universal unique identifier from the command prior to identifying the instance of the device.

5       The command may include an operational parameter for the device. The data may include an updated value of the operational parameter. The data may include a list of operational parameters for the device. The server receives a second command from the embedded controller, which includes an  
10 operational parameter from the list of operational parameters, obtains an updated value of the operational parameter, and sends the updated value of the operational parameter to the embedded controller.

      The data may include a list of operations to be performed  
15 by the embedded controller. The data may include a configuration file for the device. The server may receive the data specific to the instance of the device and store the data in memory, from which it is retrieved. The data specific to the instance of the device may be received via a Web page  
20 generated by the server. The server may run the Hypertext Transfer Protocol and the command may contain Extensible Markup Language code.

In general, in another aspect, the invention is directed to a system that includes a controller embedded in a device that is capable of communicating over a computer network, and a server that is capable of communicating over the computer  
5 network. The embedded controller sends a command to the server over the computer network that identifies an instance of the device and, in response, the server (i) identifies the instance of the device based on the command, (ii) retrieves data that is specific to the instance of the device, and (iii)  
10 sends the data to the embedded controller over the computer network.

This aspect of the invention may include one or more of the following features. The embedded controller is not remotely-addressable from the computer network. The computer  
15 network is the Internet. The server runs the Hypertext Transfer Protocol and the command may contain Extensible Markup Language code.

Other features and advantages of the invention will become apparent from the following description, including the  
20 claims and drawings.

### Brief Description of the Drawings

Fig. 1 is a block diagram of a network containing a server and a device having an embedded controller;

Fig 2 is a flowchart showing a process by which the  
5 embedded controller retrieves data for the device from the server; and

Fig 3 is a flowchart showing an alternative process by which the embedded controller retrieves data for the device from the server.

10

### Description

Fig. 1 shows a network 10. Network 10 includes a device 11 containing an embedded controller 17. Device 11 is any type of apparatus or system having functions that are  
15 monitored and controlled by embedded controller 17.

Device 11 is connected to an internal network 12, such as a LAN. A router or modem 14 couples internal network 12 to an external network 15, such as the Internet/World Wide Web (Web). External network 15 runs TCP/IP (Transmission Control  
20 Protocol/Internet Protocol) or some other suitable protocol. Network connections are via Ethernet, telephone line, wireless, or other transmission media.

External network 15 contains a server 19, which is a computer or any other processing device. Server 19 communicates with embedded controller 17 over external network 15 and internal network 12. Embedded controller 17 has a  
5 local IP (Internet Protocol) address that can be resolved within internal network 12. However, this local IP address may not be recognizable by devices on external network 15, such as server 19. As such, server 19 may not be able to directly address device 11.

10

#### Embedded Controller

Embedded controller 17 runs software 20, which includes web client application 21 and operating software 22. Web client application 21 includes a TCP/IP protocol stack that  
15 allows embedded controller 17 to communicate over external network 15. Device operating software 22 provides an interface between Web client application 21 and a database 24.

Through device operating software 22, embedded controller 17 retrieves data stored in database 24 and stores data in  
20 database 24.

Database 24 is stored in a memory 25 on device 11 or internal to embedded controller 17. Database 24 stores data,



including operational parameters, configuration files, and identification information for device 11.

The operational parameters constitute settings and/or control instructions for the device 11, which are implemented  
5 by embedded controller 17. The types of operational parameters that are stored in database 24 depend on the nature of device 11. For example, if device 11 is a heating/cooling system, the operational parameters may include temperature levels, humidity levels, airflow controls, vent/duct  
10 open/close controls, and fan motor speed settings. A configuration file is a file that contains a set of one or more operational parameters for an instance of device 11.

What is meant by "instance" is the specific identity of device 11 as distinguished from other identical devices. The  
15 identification information stored in database 24 identifies the instance of device 11. This identification information includes, but is not limited to, data identifying the type of the device, a common (or "friendly") name for the device, the manufacturer of the device, the model name of the device, the  
20 model number of the device, the serial number of the device, and a universal unique identifier (UUID) for the device.

The device type specifies a uniform resource locator

(URL) for the device, which includes the name of the device. This information identifies a Web site that is associated with, and generated by, server 19 for the device. For example, a device type might be:

5

www.SonyVideo.com/television/Vega/XBR400

for a Sony® Vega® XBR400® television that includes an embedded controller. The common name of the device is how the device  
10 is known in the vernacular, e.g., "television". The manufacturer identifies the manufacturer of the device, e.g., Sony®. The model name identifies the particular model of the device, e.g., Vega®. The model number identifies the model number of the device, e.g., XBR400®. The serial number  
15 identifies the serial number of a particular instance of the device, e.g., 53266D. The UUID is a universal identifier for the instance of the device, e.g., 4A89EA70-73B4-11d4-80DF-0050DAB7BAC5. Of the data shown above, only the serial number and the UUID are unique to the instance of device 11.

20

#### Server

Server 19 is a computer that runs HTTP (Hypertext

Transfer Protocol). Server 19 includes a controller 27, such as a microprocessor, for executing software to perform the functions described below. To avoid confusion in terminology, the following reads as though those functions are performed by  
5 server 19, even though software in controller 27 of server 19 performs the functions.

Server 19 executes Web server software 29 to communicate over external network 15. Web server software 29 also hosts a Web page associated with device 11. The Web page (not shown)  
10 is displayed on the computer of a user, such as the owner of device 11, who may input updated operational parameters for the device. These input updated operational parameters are transmitted to Web server software 29 over external network 15. Web server software 29 stores the updated parameters in  
15 database 30.

Web server software 29 stores and retrieves data in database 30 using application logic 32. Application logic 32 is software for accessing database 30 using the CGI (Common Gateway Interface) protocol. CGI is a well-known protocol for  
20 accessing a database. The operational parameters can be stored in database 30 individually or as part of a configuration file for an instance of device 11.

Database 30 is stored in a memory 31, which is inside of, or external to, server 19. Database 30 stores data associated with device 11, including the operational parameters noted above. Other data that may be stored for device 11 is  
5 described below.

#### The Data Transfer Process

Embedded controller 17 executes software 20 to retrieve data, such as operational parameters, from remote server 19.  
10 Server 19 executes software 34 to send the data to embedded controller 17. Fig. 2 shows these processes in detail. The left half of Fig. 2, titled "Embedded Controller" shows process 40 performed by embedded controller 17, and the right half of Fig. 2, titled, "Server", shows process 41 performed  
15 by server 19.

Process 40 generates and sends (201) a command to server 19. The command, or a modified version thereof, is sent by embedded controller 17 to server 19 periodically. It is through this command that embedded controller 17 polls server  
20 19 to determine if there are any new/updated operational parameters for device 11.

The command includes data identifying device 11. The

data identifies the specific instance of device 11 and includes a device type field and one or both of a device serial number field and a device UUID. The command may also include the common name field, the manufacturer name field, 5 the model name field, and the model number field, as set forth above.

The command may be either an HTTP GET command or an HTTP post command. The data included in those commands is similar, with the difference being that the HTTP GET command retrieves 10 a document, such as a configuration file, that contains operational parameters and the HTTP POST command retrieves individual operational parameters. An example of an HTTP GET command is shown in Appendix A and an example of an HTTP POST command is shown in Appendix B.

15 The HTTP POST and GET commands shown in Appendices A and B contain XML (eXtensible Markup Language) commands. XML is a self-describing computer language in the sense that fields in the XML code identify variables and their values in the XML code. For example, as shown in the Appendices, the 20 "manufacturer" field identifies a manufacturer, e.g., Sony®, and is delineated by "<manufacturer>" to indicate the start of the field and "</manufacturer>" to indicate the end of the

field. XML is used because it can be generated, parsed and read relatively easily by server 19 and embedded controller 17.

As noted, the GET command is used to retrieve a document from server 19. The document to be retrieved corresponds to the fields in the GET command, in particular to the device type, serial number and/or UUID fields. By contrast, the POST command is used to retrieve individual operational parameters.

The operational parameters that are to be retrieved are listed in the POST command itself. For example, as shown in Appendix B, the operational parameters include airflow, humidity, motor and vent values for the fictitious "widget" device. The current values of these parameters are specified in the POST command shown in Appendix B as follows:

15

```
    <parameters>
      <Airflow xsd:type="integer">378</Airflow>
      <Humidity xsd:type="double">46.7</Humidity>
      <Motor xsd:type="integer">1500</Motor>
      <Vent xsd:type="integer">4</Vent>
    </parameters>
```

20

The updated values of these parameters are returned by server 19 to embedded controller 17 in a reply POST command. The updated values of these parameters are specified in the POST

command shown in Appendix B as follows:

```
5      <parameters>
        <Motor xsd:type="integer">1250</ Motor >
        <Vent xsd:type="integer">2</Vent>
      </parameters>
```

As shown, both the POST and GET commands include the URL  
10 of the device in the device type field. As described below,  
this directs server 19 to a Web site associated with device 11  
and, thereafter, in the case of a GET Command, to retrieve a  
specific Web page that is generated by server 19 for the  
device. It is noted that, since the POST command retrieves  
15 parameters, not a document like the GET command, the POST  
command need not include a URL of the device.

Referring back to Fig. 2, process 41 (in server 19)  
receives (202) the command from embedded controller 17.  
Process 41 identifies the command as either a POST or GET  
20 command based on a header, such as "POST/CONTROL HTTP/1.1"  
(see the headers in Appendices A and B), in the command.  
Process 41 uses an XML parser to parse (203) the various  
identifying fields, such as device type, serial number, and  
UUID, from the command.

25 Process 41 identifies (204) the instance of device 11

based on the information parsed from the command. That is, process 41 uses the device type, serial number, and UUID field information to identify the instance.

5       If The Command Is A POST Command

The remaining identification information from the command is used to narrow the search through database 30 down to data for the specific instance of device 11. The device serial number and/or UUID are used to retrieve operational parameters  
10   specific to device 11.

Once the appropriate data has been identified (204), process 41 retrieves (205) that data using application logic 32. Process 41 compares the values of the operational parameters to those included in the POST command. If the  
15   values are the same, process 41 returns an indication that there are no new/updated values for device 11. If the values of the operational parameters are different, process 41 adds the appropriate updated value fields to the POST command and sends (206) the POST command, with the updated operational  
20   parameters, back to embedded controller 17. Thus, only those operational parameters that differ from their original values are returned to embedded controller 17 in the POST command.



If The Command Is A GET Command

As was the case above with the POST command, the remaining identification information from the command is used to narrow the search through database 30 down to data for the specific instance of device 11. In particular, the device serial number and/or UUID are used to retrieve (205) a configuration file that is specific to device 11. Process 41 then sends (206) the configuration file to embedded controller 17. The configuration file may be a Web page identified by the URL in the device type field. This Web page is generated by server 19 using parameters stored in database 30 and then sent to device 11. It is noted that the complete Web page itself need not be stored. Alternatively, the GET command may retrieve separate configuration files and Web pages.

Process 40 in embedded controller 17 receives (207) the data (operational parameters or configuration file) from server 19 in response to sending (201) the command. Process 40 then uses the data to update/reset device 11. For example, if device 11 is a heating system, a new operational parameter may be a new temperature setting for its thermostat. In this

example, embedded controller 17 sets the new temperature accordingly. If the device is a television, a new operational parameter may indicate that certain pay television stations are now available. In this case, embedded controller 17  
5 performs any appropriate decoding/descrambling functions on the television signal.

#### Alternative Embodiment

Fig. 3 shows alternative embodiments of processes 40,41.  
10 In processes 40,41, the GET and POST commands request the same parameters each time the commands are issued. The parameters requested are encoded in the software to implement process 40. This embodiment provides a way to change the parameters that are requested without altering the software  
15 that generates the request/command.

Referring to Fig. 3, process 45 in embedded controller 17 begins by sending (301) a command to server 19. The command, in this case, is an HTTP GET command, since it is requesting a document, not individual operational parameters. The document  
20 is an XML document that contains a list of operational parameters to be updated. Using this document, embedded controller 17 can change the operational parameters that it

periodically updates.

Process 46 in server 19 receives (302) the command from embedded controller 17, parses (303) the command using an XML parser to obtain the information specific to the instance of  
5 device 11, and identifies (304) the appropriate document based on this information. As before, the information that identifies the instance of device 11 includes, among other things, the device type, its serial number, and its UUID. Process 46 retrieves (305) the document containing the list of  
10 operational parameters to be updated, and sends (306) the document back to embedded controller 17.

Process 45 in embedded controller 17 receives (307) the document from server 19, parses (308) the operational parameters to be updated from the document, and formulates  
15 (309) a POST command to send to server 19. The command is formulated using a command template (not shown), into which process 45 inserts the operational parameters parsed from the document. Process 45 sends this second command to the server.

At this point, processes 45 and 46 operate (310) in the same  
20 manner as processes 40 and 41, respectively, when used with a POST command. Accordingly, the details of processes 40, 41 are not repeated here.

This alternative embodiment may be generalized further. For example, rather than simply retrieving a list of operational parameters, embedded controller 17 may retrieve, from server 19, a list of operations that it is to perform.

5 For example, that list may contain operational parameters to be updated, times at which the updates are to occur, a schedule of diagnostic tests, and the like. Any operation that may be performed by embedded controller 17 may be included on the list.

10 The process for retrieving the list of operations is identical to processes 45 and 46, save for the contents of the list itself. The actions that embedded controller takes once it has the list (i.e., 310) depend on the contents of the list. For example, the list might specify that parameters are  
15 to be updated every hour and may also contain a list of the parameters to be updated. The list may contain XML commands, which can be parsed by embedded controller 17. Thus, embedded controller 17 reads the commands in the list and performs the appropriate operations with respect to device 11.

20

#### Architecture

Processes 40,41 and 45,46 are not limited to use with the

hardware/software configuration of Fig. 1; they may find applicability in any computing or processing environment. Processes 40,41 and 45,46 may be implemented in hardware (e.g., an ASIC {Application-Specific Integrated Circuit} and/or an FPGA {Field Programmable Gate Array}), software, or  
5 a combination of hardware and software.

Processes 40,41 and 45,46 may be implemented using one or more computer programs executing on programmable computers that each includes a processor, a storage medium readable by  
10 the processor (including volatile and non-volatile memory and/or storage elements), at least one input device, and one or more output devices.

Each such program may be implemented in a high level procedural or object-oriented programming language to  
15 communicate with a computer system. Also, the programs can be implemented in assembly or machine language. The language may be a compiled or an interpreted language.

Each computer program may be stored on a storage medium or device (e.g., CD-ROM, hard disk, or magnetic diskette) that  
20 is readable by a general or special purpose programmable computer for configuring and operating the computer when the storage medium or device is read by the computer to perform

processes 40,41 and 45,46.

Processes 40,41 and 45,46 may also be implemented as a computer-readable storage medium, configured with a computer program, where, upon execution, instructions in the computer  
5 program cause the computer to operate in accordance with processes 40,41 and 45,46.

The invention is not limited to use with the protocols and standards described above. For example, Web server may use Java Servlets, ASP (Active Server Pages), and/or ISAPI  
10 (Internet Server Application Programming Interface) to communicate with application logic 32, instead of, or in addition to, CGI. The commands sent by embedded controller 17 and/or server 19 (e.g., in 201, 301, 310) are not limited to HTTP GET and POST commands. Any commands and/or requests for  
15 requesting and receiving data may be used.

The data transferred to embedded controller 17 by server 19 is not limited to operational parameters or configuration files. The data may include, for example, a schedule of actions to be performed by device 11 that is based on  
20 information pertaining the owner of the device. For example, owner preferences may be stored in database 30. The instance-specific data may be used by server 19 to correlate the owner

of the device to the appropriate preferences. These preferences then may be transmitted back to device 11 to control the operation thereof.

The original parameters sent by embedded controller 17 to  
5 server 19 may be used by server 19 to calculate new, updated parameters based on data stored in database 30. Thus, the invention is not limited to simply retrieving updated data, but may also include calculating new data based on currently-available data.

10 The documents and commands described above are not limited to XML format. Any computer language may be used for the commands. The documents may be in any format, for example, HTML (Hypertext Markup Language) documents may be used. In addition, the invention is not limited to use with  
15 the Web, Web servers, and the like. The servers and embedded controllers described herein may be the same type of general-purpose computer appropriately programmed, or different devices.

Other embodiments not described herein are also within  
20 the scope of the following claims.

Appendix AGET COMMAND

```
5  GET /Widget/config.xml HTTP/1.1
    HOST: www.acme.com
    Content-Type: text/xml
    Content-length: nnn

10  <?xml version="1.0"?>
    <root xmlns="urn:schemas-upnp-org:device-1-0">
        <specVersion>
            <major>1</major>
            <minor>0</minor>
        </specVersion>
15  <device>
        <deviceType>urn:www-acme-com:device:Widget:3</deviceType>
        <friendlyName>Widget</friendlyName>
        <manufacturer>Acme Industries</manufacturer>
        <modelName>Widget</modelName>
20  <modelName>Widget</modelName>
        <modelName>Widget</modelName>
        <modelNumber>3</modelNumber>
        <serialNumber>53266D</serialNumber>
        <UDN>uuid:4A89EA70-73B4-11d4-80DF-0050DAB7BAC5</UDN>
        </device>
    </root>
25
```



Appendix BPOST COMMAND

```

POST /CONTROL HTTP/1.1
5  Host: www.acme.com
  Content-Type: text/xml
  Content-length: nnn

  <?xml version="1.0"?>
10  <root xmlns="urn:schemas-upnp-org:device-1-0">
    <specVersion>
      <major>1</major>
      <minor>0</minor>
    </specVersion>
15  <device>
    <deviceType>urn:www-acme-com:device:Widget:3</deviceType>
    <friendlyName>Widget</friendlyName>
    <manufacturer>Acme Industries</manufacturer>
    <modelName>Widget</modelName>
20  <modelName>3</modelName>
    <serialNumber>53266D</serialNumber>
    <UDN>uuid:4A89EA70-73B4-11d4-80DF-0050DAB7BAC5</UDN>
    </device>
  </root>
25  <parameters>
    <Airflow xsd:type="integer">378</Airflow>
    <Humidity xsd:type="double">46.7</Humidity>
    <Motor xsd:type="integer">1500</Motor>
    <Vent xsd:type="integer">4</Vent>
30  </parameters>

  And the response containing parameters that have been
  modified:

  HTTP/1.1 200 OK
35  Connection: close
    Content-Type: text/xml
    Content-length: nnn
    Date: Fri, 13 Jun 2000 13:43:05 GMT

40  <?xml version="1.0"?>

```

```
<parameters>
  <Motor xsd:type="integer">1250</ Motor >
  <Vent xsd:type="integer">2</Vent>
</parameters>
```

5

What is claimed is:

1. A method performed by a controller embedded in a device for retrieving data from a server, comprising:  
sending a command to the server that identifies an  
5 instance of the device; and  
receiving, from the server and in response to command, data that is specific to the instance of the device.
2. The method of claim 1, wherein the command includes  
10 an operational parameter for the device and the data comprises an updated value for the operational parameter.
3. The method of claim 2, wherein the command includes plural operational parameters for the device and the data  
15 comprises updated values that differ from current values of the operational parameters.
4. The method of claim 1, wherein the data comprises a list of operational parameters; and  
20 the method further comprises:  
sending a second command to the server, which includes operational parameters from the list; and

receiving, from the server and in response to second command, updated values of one or more of the operational parameters included in the second command.

- 5           5. The method of claim 1, wherein the data comprises a list of operations to be performed by the controller; and the method further comprises:  
parsing the operations from the list; and  
performing the operations from the list.

10

6. The method of claim 1, wherein the data comprises a configuration file for the device.

7. The method of claim 1, wherein the command identifies  
15 the instance of the device by a device type and/or one or more of a serial number and a universal unique identifier.

8. The method of claim 1, wherein the embedded controller sends the command to the server periodically.

20

9. The method of claim 1, wherein the server runs the Hypertext Transfer Protocol and the command contains Extensible Markup Language Code.

5        10. A method performed by a server for sending data over a network to a controller embedded in a device, comprising:  
receiving a command from the embedded controller;  
identifying an instance of the device from information in the command;  
10        retrieving data that is specific to the instance of the device; and  
sending the data to the embedded controller.

11. The method of claim 10, wherein:  
15        the command includes a device type and/or one or more of a serial number and a universal unique identifier; and  
the instance of the device is identified based on the device type and/or one or more of the serial number and the universal unique identifier.

20

12. The method of claim 11, further comprising:  
parsing the device type and one or more of the serial  
number and universal unique identifier from the command prior  
to identifying the instance of the device.

5

13. The method of claim 10, wherein:  
the command includes an operational parameter for the  
device; and  
the data comprises an updated value of the operational  
10 parameter.

14. The method of claim 10, wherein:  
the data comprises a list of operational parameters for  
the device; and

15

the method further comprises:

receiving a second command from the embedded  
controller, which includes an operational parameter from  
the list of operational parameters;

obtaining an updated value of the operational  
20 parameter; and

sending the updated value of the operational  
parameter to the embedded controller.

15. The method of claim 10, wherein the data comprises a list of operations to be performed by the device.

5        16. The method of claim 10, wherein the data comprises a configuration file for the device.

17. The method of claim 10, further comprising:  
receiving the data specific to the instance of the  
10 device; and  
storing the data in memory;  
wherein the data is retrieved from the memory.

18. The method of claim 17, wherein the data specific to  
15 the instance of the device is received via a Web page generated by the server.

19. The method of claim 10, wherein the server runs the Hypertext Transfer Protocol and the command contains  
20 Extensible Markup Language Code.

20. A system comprising:

a controller embedded in a device, the controller being capable of communicating over a computer network; and

a server that is capable of communicating over the computer network;

5        wherein the embedded controller sends a command to the server over the computer network that identifies an instance of the device and, in response, the server (i) identifies the instance of the device based on the command, (ii) retrieves data that is specific to the instance of the device, and (iii)  
10        sends the data to the embedded controller over the computer network.

21. The system of claim 20, wherein the embedded controller is not remotely-addressable from the computer  
15        network.

22. The system of claim 20, wherein the computer network comprises the Internet.

20        23. The system of claim 20, wherein the server runs the Hypertext Transfer Protocol and the command contains Extensible Markup Language Code.



24. A computer program stored on a computer-readable medium, the computer program being executable by a controller embedded in a device to retrieve data from a server, the  
5 computer program comprising instructions that cause the embedded controller to:

send a command to the server that identifies an instance of the device; and

receive, from the server and in response to command, data  
10 that is specific to the instance of the device.

25. The computer program of claim 24, wherein the command includes an operational parameter for the device and the data comprises an updated value for the operational  
15 parameter.

26. The computer program of claim 25, wherein the command includes plural operational parameters for the device and the data comprises updated values that differ from current  
20 values of the operational parameters.

27. The computer program of claim 24, wherein the data

comprises a list of operational parameters; and

the computer program further comprises instructions that cause the embedded controller to:

send a second command to the server, which includes  
5 operational parameters from the list; and

receive, from the server and in response to second command, updated values of one or more of the operational parameters included in the second command.

10 28. The computer program of claim 24, wherein the data comprises a list of operations to be performed by the controller; and

the computer program further comprises instructions that cause the embedded controller to:

15 parse the operations from the list; and  
perform the operations from the list.

29. The computer program of claim 24, wherein the data comprises a configuration file for the device.

20

30. The computer program of claim 24, wherein the command identifies the instance of the device by a device type and/or one or more of a serial number and a universal unique identifier.

5

31. The computer program of claim 24, wherein the embedded controller sends the command to the server periodically.

10

32. The computer program of claim 24, wherein the server runs the Hypertext Transfer Protocol and the command contains Extensible Markup Language Code.

33. A computer program stored on a computer-readable  
15 medium that is executable by a server to send data over a network to a controller embedded in a device, the computer program comprising instructions that cause the server to:  
receive a command from the embedded controller;  
identify an instance of the device from information in  
20 the command;  
retrieve data that is specific to the instance of the device; and

send the data to the embedded controller.

34. The computer program of claim 33, wherein:

the command includes a device type and/or one or more of  
5 a serial number and a universal unique identifier; and  
the instance of the device is identified based on the  
device type and/or one or more of the serial number and the  
universal unique identifier.

10 35. The computer program of claim 34, further comprising  
instructions that cause the server to:

parse the device type and one or more of the serial  
number and universal unique identifier from the command prior  
to identifying the instance of the device.

15

36. The computer program of claim 33, wherein:

the command includes an operational parameter for the  
device; and

the data comprises an updated value of the operational  
20 parameter.

37. The computer program of claim 33, wherein:  
the data comprises a list of operational parameters for  
the device; and  
the computer program further comprises instructions that  
5 cause the server to:  
receive a second command from the embedded  
controller, which includes an operational parameter from  
the list of operational parameters;  
obtain an updated value of the operational  
10 parameter; and  
send the updated value of the operational parameter  
to the embedded controller.

38. The computer program of claim 33, wherein the data  
15 comprises a list of operations to be performed by the device.

39. The computer program of claim 33, wherein the data  
comprises a configuration file for the device.

20 40. The computer program of claim 33, further comprising  
instructions that cause the server to:  
receive the data specific to the instance of the device;

and

store the data in memory;

wherein the data is retrieved from the memory.

5       41. The computer program of claim 40, wherein the data specific to the instance of the device is received via a Web page generated by the server.

42. The computer program of claim 33, wherein the server  
10 runs the Hypertext Transfer Protocol and the command contains Extensible Markup Language Code.

43. An apparatus for retrieving data from a server,  
comprising:

15       a memory which stores executable instructions; and  
a controller which executes the instructions to:  
send a command to the server that identifies an  
instance of the device; and  
receive, from the server and in response to command,  
20 data that is specific to the instance of the device.

44. The apparatus of claim 43, wherein the command

includes an operational parameter for the device and the data comprises an updated value for the operational parameter.

45. The apparatus of claim 44, wherein the command  
5 includes plural operational parameters for the device and the data comprises updated values that differ from current values of the operational parameters.

46. The apparatus of claim 43, wherein the data  
10 comprises a list of operational parameters; and  
the apparatus executes instructions to:  
send a second command to the server, which includes operational parameters from the list; and  
receive, from the server and in response to second  
15 command, updated values of one or more of the operational parameters included in the second command.

47. The apparatus of claim 43, wherein the data  
comprises a list of operations to be performed by the  
20 controller; and  
the apparatus executes instructions to:  
parse the operations from the list; and

perform the operations from the list.

48. The apparatus of claim 43, wherein the data comprises a configuration file for the device.

5

49. The apparatus of claim 43, wherein the command identifies the instance of the device by a device type and/or one or more of a serial number and a universal unique identifier.

10

50. The apparatus of claim 43, wherein the embedded controller sends the command to the server periodically.

51. The apparatus of claim 43, wherein the server runs the Hypertext Transfer Protocol and the command contains Extensible Markup Language Code.

52. An apparatus for sending data over a network to a controller embedded in a device, comprising:

20     a memory which stores executable instructions; and  
       a controller which executes the instructions to:  
          receive a command from the embedded controller;



identify an instance of the device from information  
in the command;

retrieve data that is specific to the instance of  
the device; and

5           send the data to the embedded controller.

53. The apparatus of claim 52, wherein:

the command includes a device type and/or one or more of  
a serial number and a universal unique identifier; and

10           the instance of the device is identified based on the  
device type and/or one or more of the serial number and the  
universal unique identifier.

54. The apparatus of claim 53, wherein the apparatus  
15 executes instructions to:

parse the device type and one or more of the serial  
number and universal unique identifier from the command prior  
to identifying the instance of the device.

20           55. The apparatus of claim 52, wherein:

the command includes an operational parameter for the  
device; and

the data comprises an updated value of the operational parameter.

56. The apparatus of claim 52, wherein:  
5 the data comprises a list of operational parameters for the device; and  
the apparatus executes instructions to:  
receive a second command from the embedded  
controller, which includes an operational parameter from  
10 the list of operational parameters;  
obtain an updated value of the operational  
parameter; and  
send the updated value of the operational parameter  
to the embedded controller.

15

57. The apparatus of claim 52, wherein the data comprises a list of operations to be performed by the device.

58. The apparatus of claim 52 wherein the data comprises  
20 a configuration file for the device.

59. The apparatus of claim 52, wherein:

the apparatus executes instructions to:

receive the data specific to the instance of the  
device; and

store the data in memory; and

5 the data is retrieved from the memory.

60. The apparatus of claim 59, wherein the data specific  
to the instance of the device is received via a Web page  
generated by the server.

10

61. The apparatus of claim 52, wherein the apparatus  
runs the Hypertext Transfer Protocol and the command contains  
Extensible Markup Language Code.

15

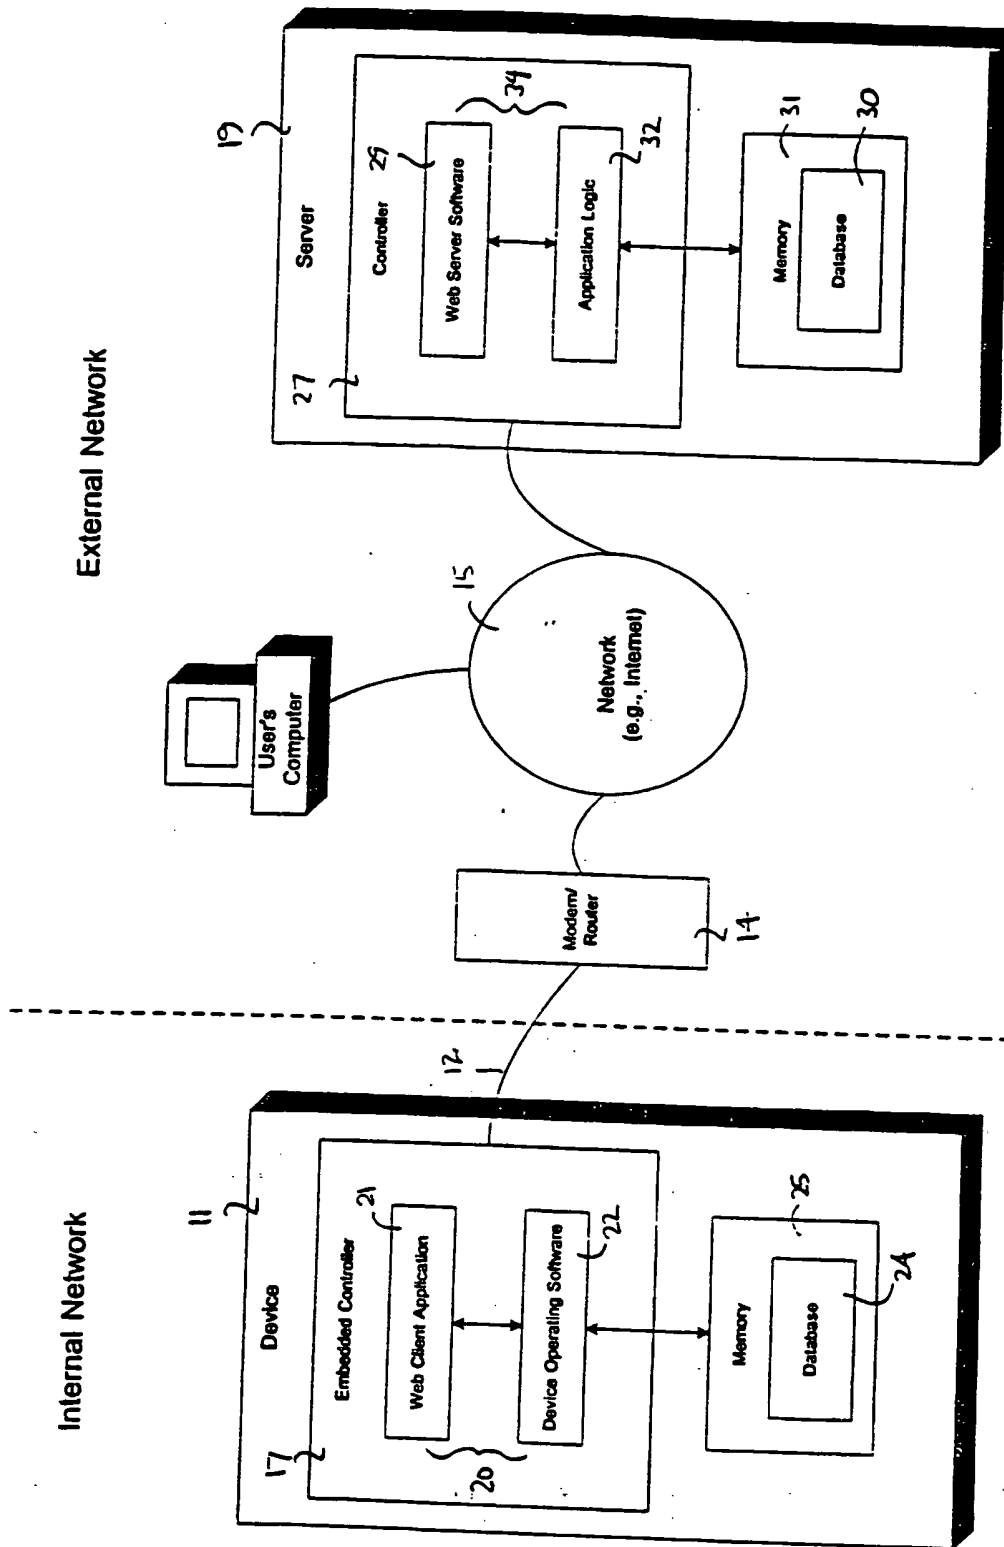


FIG. 1

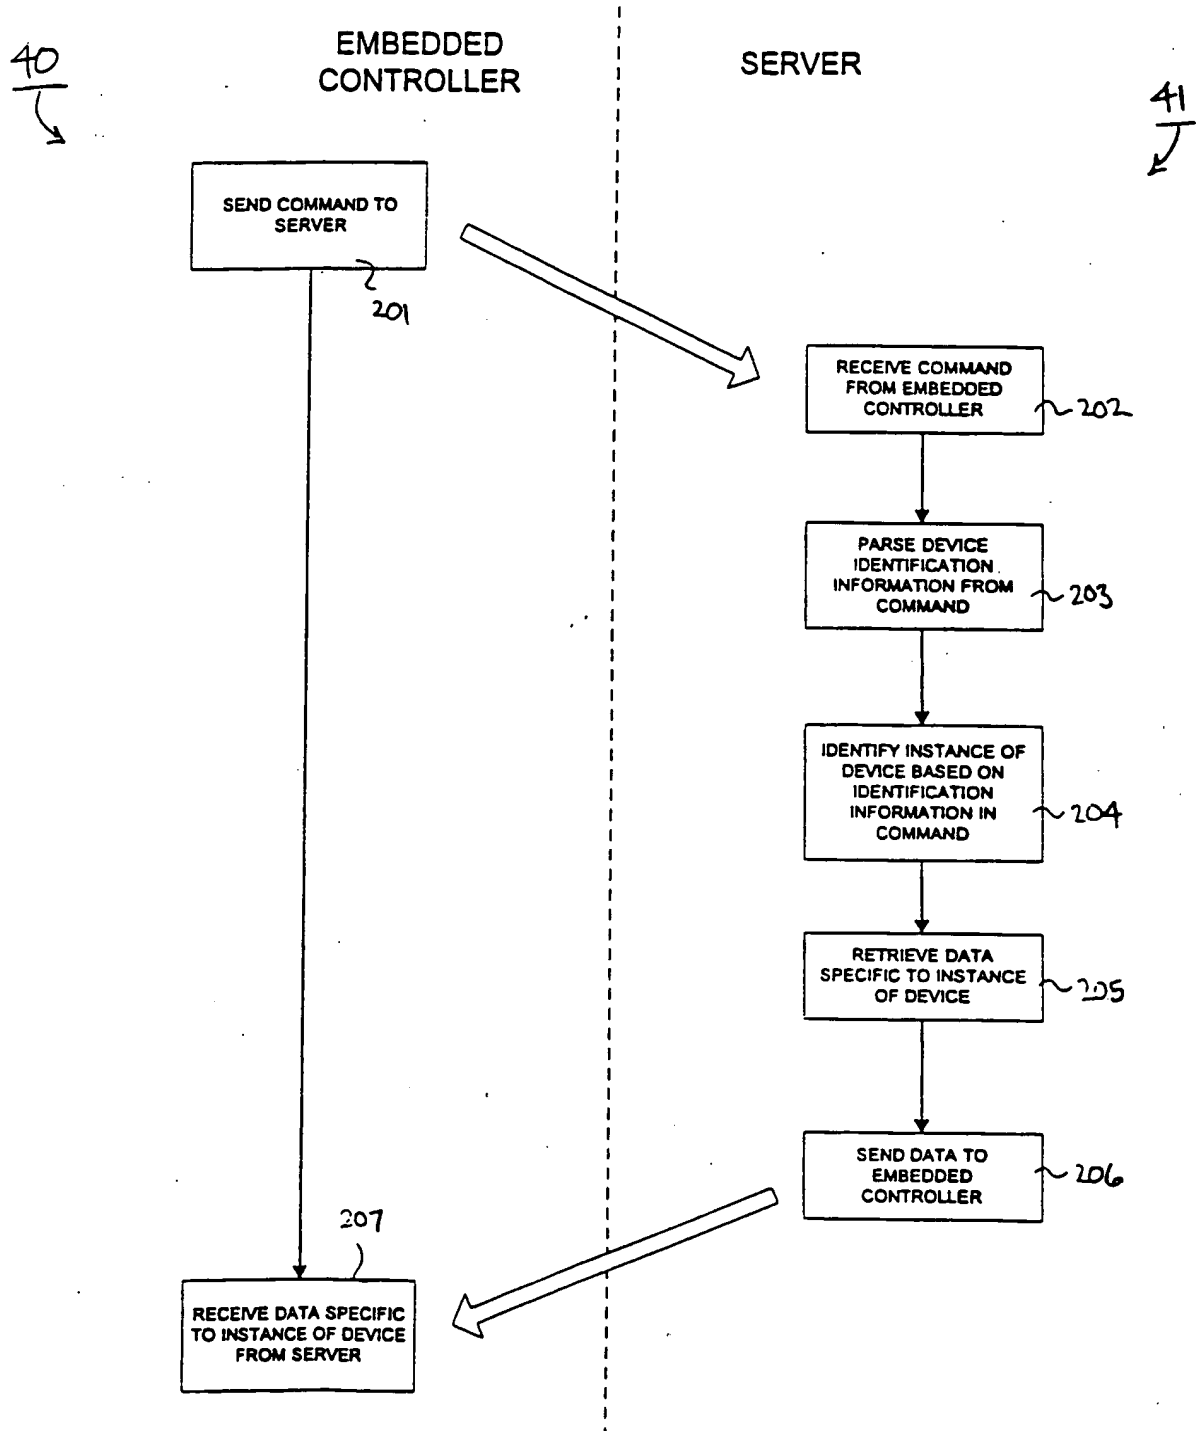


FIG. 2

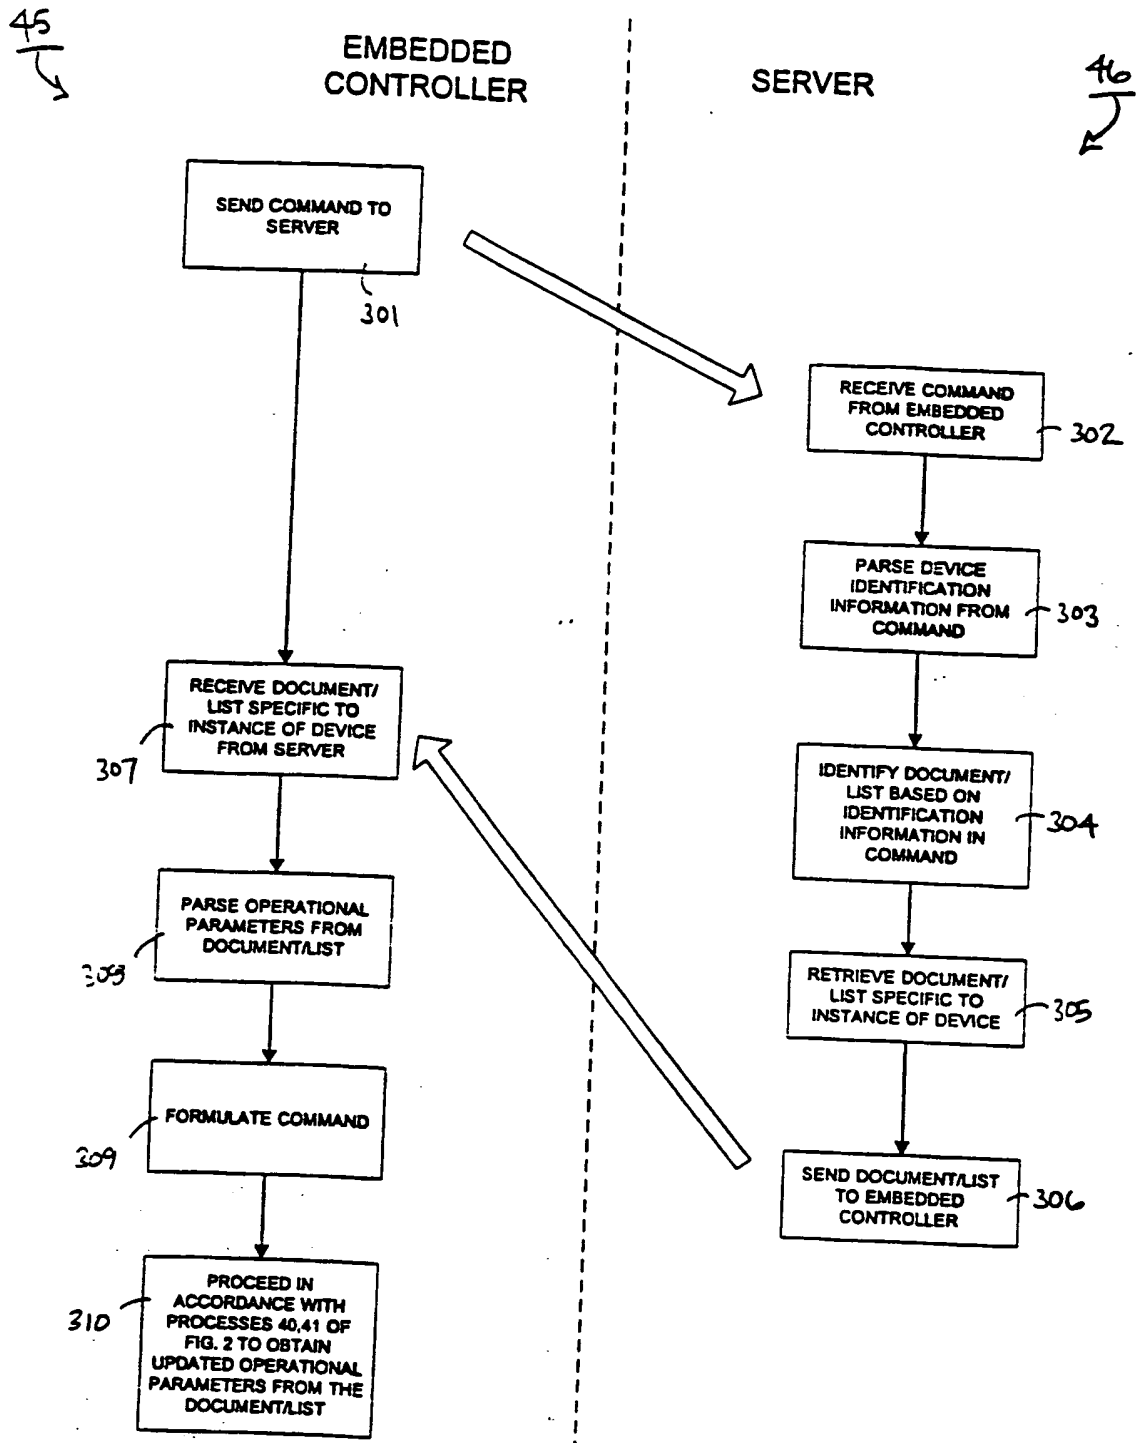


FIG. 3

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 March 2002 (28.03.2002)

PCT

(10) International Publication Number  
**WO 02/025501 A3**

(51) International Patent Classification<sup>7</sup>: G06F 17/30, 1104L 29/06

(21) International Application Number: PCT/US01/29787

(22) International Filing Date:  
24 September 2001 (24.09.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/667,737 22 September 2000 (22.09.2000) US

(63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:  
US 09/667,737 (CON)  
Filed on 22 September 2000 (22.09.2000)

(71) Applicant (for all designated States except US): EMATION, INC. [US/US]; Cabot Business Park, 89 Forbes Boulevard, Mansfield, MA 02048 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): HANSEN, James, R. [US/US]; 66 Stoneridge Road, Franklin, MA 02038 (US).

(74) Agent: PYSHER, Paul, A.; Fish & Richardson, P.C., 225 Franklin Street, Boston, MA 02110 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:  
22 August 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



**WO 02/025501 A3**

(54) Title: RETRIEVING DATA FROM A SERVER

(57) Abstract: A system includes a server and a controller embedded in a device. Both the server and the embedded controller are capable of communicating over a computer network. The embedded controller sends a command to the server over the computer network that identifies an instance of the device. In response, the server identifies the instance of the device based on the command, retrieves data that is specific to the instance of the device, and sends the data to the embedded controller over the computer network.

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 7 G06F17/30 H04L29/06				
According to International Patent Classification (IPC) or to both national classification and IPC				
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 7 H04L G05B G06F				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB, COMPENDEX				
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>				
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
Y	EDWARD STEINFELD: "From Standalone to Internet Appliance" CIRCUIT CELLAR ONLINE, 'Online! April 2000 (2000-04), pages 1-7, XP002201937 Retrieved from the Internet: <URL:http://www.chipcenter.com/circuitcellar/april100/pdf/c0400espdf.pdf> 'retrieved on 2002-06-10!  page 3, left-hand column -middle column page 2; table 1  --- -/--	1,6,7, 9-11,16, 19,20, 22-24, 29,30, 32-34, 39,42, 43,48, 49, 51-53, 58,61		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C.				
<input checked="" type="checkbox"/> Patent family members are listed in annex.				
<b>* Special categories of cited documents:</b> <table border="0"> <tr> <td> <b>*A*</b> document defining the general state of the art which is not considered to be of particular relevance  <b>*E*</b> earlier document but published on or after the international filing date  <b>*L*</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  <b>*O*</b> document referring to an oral disclosure, use, exhibition or other means  <b>*P*</b> document published prior to the international filing date but later than the priority date claimed             </td> <td> <b>*T*</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention  <b>*X*</b> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone  <b>*Y*</b> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.  <b>*8*</b> document member of the same patent family             </td> </tr> </table>			<b>*A*</b> document defining the general state of the art which is not considered to be of particular relevance <b>*E*</b> earlier document but published on or after the international filing date <b>*L*</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) <b>*O*</b> document referring to an oral disclosure, use, exhibition or other means <b>*P*</b> document published prior to the international filing date but later than the priority date claimed	<b>*T*</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention <b>*X*</b> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone <b>*Y*</b> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. <b>*8*</b> document member of the same patent family
<b>*A*</b> document defining the general state of the art which is not considered to be of particular relevance <b>*E*</b> earlier document but published on or after the international filing date <b>*L*</b> document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) <b>*O*</b> document referring to an oral disclosure, use, exhibition or other means <b>*P*</b> document published prior to the international filing date but later than the priority date claimed	<b>*T*</b> later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention <b>*X*</b> document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone <b>*Y*</b> document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. <b>*8*</b> document member of the same patent family			
Date of the actual completion of the international search 12 June 2002		Date of mailing of the international search report 28/06/2002		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Peeters, D		



## INTERNATIONAL SEARCH REPORT

International Application No

PC1/US 01/29787

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	<p>WO 99 21336 A (SLABY JOHN ;BRANKIN HENRY (IE); LOUGHLIN THOMAS (IE); VIRTUAL ACCE) 29 April 1999 (1999-04-29)</p> <p>abstract page 7, line 23 -page 9, line 20; figure 2 page 11, line 11 -page 12, line 14; figure 3</p>	<p>1,6,7, 9-11,16, 19,20, 22-24, 29,30, 32-34, 39,42, 43,48, 49, 51-53, 58,61</p>
A	<p>US 5 975 737 A (GOLDMAN CRAIG E ET AL) 2 November 1999 (1999-11-02) abstract column 6, line 25 - line 60 column 7, line 31 - line 52</p>	1-61
A	<p>"RomWebClient Embedded HTTP client Toolkit" ALLEGROSOFT, 'Online! 9 July 2000 (2000-07-09), pages 1-2, XP002201938 Retrieved from the Internet: &lt;URL:http://web.archive.org/web/20000709204234/http://www.allegrosoft.com/romwebclient.html&gt; 'retrieved on 2002-06-12! the whole document</p>	1-61
A	<p>"Allegro Software product release overview" GREENHILLS SOFTWARE INC., 'Online! 10 June 2002 (2002-06-10), pages 1-1, XP002201939 Retrieved from the Internet: &lt;URL:http://www.ghs.com/partners/allegro/&gt; 'retrieved on 2002-06-10! the whole document</p>	1-61

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/29787

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9921336	A	29-04-1999	WO 9921336 A1	29-04-1999
			CA 2306704 A1	29-04-1999
			EP 1189385 A2	20-03-2002
			EP 1031220 A1	30-08-2000
			GB 2346523 A	09-08-2000
			JP 2001521331 T	06-11-2001
US 5975737	A	02-11-1999	US 5805442 A	08-09-1998
			US 5982362 A	09-11-1999

Form PCT/SA/210 (patent family annex) (July 1992)